

Versilon™ HP PFA 400 Straight Length


High-Purity PFA Straight Length Tubing

Ultra-high Purity Characteristics with Extremely Low Extractables and Leachables

Versilon HP PFA 400 Straight Length, formerly known as Furon 400 series, is specifically designed to be used with the harshest chemicals while offering an excellent level of purity.

Versilon HP PFA 400 Straight Length features a superior smooth surface inner bore, which provides excellent non-wettability, batch-to-batch clean-out and purging.

Versilon HP PFA 400 Straight Length tubing is ideal for use in the semiconductor industry, or other applications requiring high purity and/or superior chemical resistance.

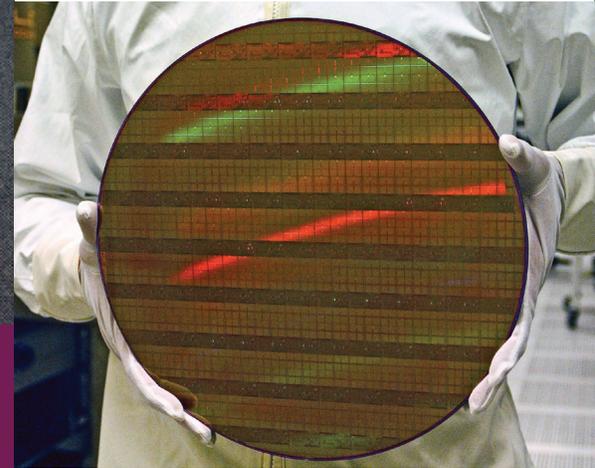

Features and Benefits

- Non-destructive/non-contaminating laser scribing for positive identification of size, material and 100% lot traceability
- 100% virgin high-purity ultra clean PFA resin - Specific material grade available
- Custom laser scribing available (for identifying chemicals/process media, tool number, OEM's name/private label, etc.)
- Optional ISO Class 7 cleanroom manufacturing environment
- Tube ends capped to prevent I.D. contamination
- "Clean-Pak" packaging available
- Straight length of 10 feet (standard or custom length) to facilitate product integration in your equipment

ASK AN ENGINEER

Versilon™ HP PFA 400 Straight Length

www.furon.com

Versilon HP PFA 400 Straight Length

A high-purity, all-virgin, thermoplastic fluoropolymer tubing with the ability to withstand a large range of temperatures from -60°F (-50°C) up to +450°F (232°C). Conditioned in straight lengths of 10 ft, each length being single bagged and then bulk packaged by packs of 10 in an outer bag.

Part Number	O.D. in (mm)	I.D. in (mm)	Wall Thickness in (mm)	Tolerance in (mm)
Standard Wall				
TSFP5.125063.HP-10	1/8" (3.17 mm)	1/16" (1.59 mm)	0.030" (0.76 mm)	+/- .004" (0.1 mm)
TSFP5.250156.HP-10	1/4" (6.35 mm)	5/32" (3.97 mm)	0.047" (1.19 mm)	+/- .004" (0.1 mm)
TSFP5.375250.HP-10	3/8" (9.52 mm)	1/4" (6.35 mm)	0.062" (1.57 mm)	+/- .005" (0.12 mm)
TSFP5.500375.HP-10	1/2" (12.7 mm)	3/8" (9.52 mm)	0.062" (1.57 mm)	+/- .005" (0.12 mm)
TSFP5.750625.HP-10	3/4" (19.05 mm)	5/8" (15.87 mm)	0.062" (1.57 mm)	+/- .005" (0.12 mm)
TSFP5.100875.HP-10	1" (25.4 mm)	7/8" (22.22 mm)	0.062" (1.57 mm)	+/- .006" (0.15 mm)
TSFP5.125110.HP-10	1-1/4" (31.75 mm)	1.1" (27.94 mm)	0.072" (1.83 mm)	+/- .008" (0.20 mm)
TCFHP-1.575-086-10	1.575" (40 mm)	1.403" (35.64 mm)	0.086" (2.18 mm)	+/- .008" (0.20 mm)
Heavy Wall				
TSFP5.250125.HP-10	1/4" (6.35 mm)	1/8" (3.17 mm)	0.062" (1.57 mm)	+/- .005" (0.12 mm)
TSFP5-750-093.HP-10	3/4" (19.05 mm)	0.564" (14.33 mm)	0.093" (2.36 mm)	+/- .005" (0.12 mm)
TSFP5-1000-093.HP-10	1" (25.4 mm)	0.814" (20.68 mm)	0.093" (2.36 mm)	+/- .006" (0.15 mm)
TSFP5-1250-093.HP-10	1-1/4" (31.75 mm)	1.064" (27.03 mm)	0.093" (2.36 mm)	+/- .008" (0.20 mm)
TSFP5-1500-093.HP-10	1-1/2" (38.1 mm)	1.314" (33.38 mm)	0.093" (2.36 mm)	+/- .008" (0.20 mm)
Thin Wall				
TSFP5.250188.HP-10	1/4" (6.35 mm)	3/16" (4.76 mm)	0.030" (0.76 mm)	+/- .003" (0.08 mm)
TSFP5.375313.HP-10	3/8" (9.52 mm)	5/16" (7.94 mm)	0.030" (0.76 mm)	+/- .003" (0.08 mm)
TSFP5.500438.HP-10	1/2" (12.7 mm)	7/16" (11.11 mm)	0.030" (0.76 mm)	+/- .003" (0.08 mm)
TSFP5.750688.HP-10	3/4" (19.05 mm)	11/16" (17.46 mm)	0.030" (0.76 mm)	+/- .003" (0.08 mm)

Customization

Special order sizes, packaging, thicknesses and lengths are available; contact the factory for items not listed above. Specific grades of raw materials may be required (for ex. Dupont 450 HP or Daikin 231 SH); contact the factory for the related PN.

www.furon.com



Saint-Gobain Performance Plastics
210 Harmony Road
Mickleton, NJ 08056
USA
Tel: (856) 423-6630
Fax: (856) 423-8182

Saint-Gobain Performance Plastics - France
56, Chemin des Berthilliers
71850 Charnay-lès-Mâcon
France
Tel: (33) 3-85-20-27-00
Fax: (33) 3-85-29-18-48

NOTE: The data and details given in this document are correct and up to date. This document is intended to provide information about the product and possible applications. This document is not the product specification and does not provide specific features, nor does it guarantee product performance in specific applications. Saint-Gobain cannot anticipate or control the conditions of the field and for this reason strongly recommends that practical tests are conducted to ensure that the product meets the requirements of a specific application.

Versilon™ is a trademark of Saint-Gobain Performance Plastics.